



BROEN BALLOMAX® MONOBLOCK AND SHORT VALVES





BROEN

Climate change is our common challenge

Energy efficiency is one of the greatest challenges of our times and for district energy BROEN delivers ready solutions to meet the globally rising demand for energy efficiency.

Based on the heritage from leading edge innovations in Danish District Heating, BROEN offers the most comprehensive range of proven valves for distribution and transmission of district heating in residential, commercial and industrial applications.

BROEN is your assurance of energy efficiency, reliability and low cost of ownership.

Our brand is our promise.


ABOUT BROEN

In 1948 Poul Broen established the company BROEN, which was among the pioneers, when district heating took off in Denmark. In 1982 the BROEN Ballomax® ball valve for district heating was launched. We strive to develop and improve products, that use nature's resources as efficiently as possible.

In 1993 BROEN was acquired by Aalberts Industries and today we have more than 15,000 colleagues operating from more than 200 locations in more than 30 countries. Aalberts Industries (AALB) is listed at the EuroNext Stock Exchange, NL

VISION AND VALUES

Our vision is simple: Be the best in valve technology. Strong values are the foundation for our business and with the same shared vision they link us together as one company across borders and time zones on 3 continents.

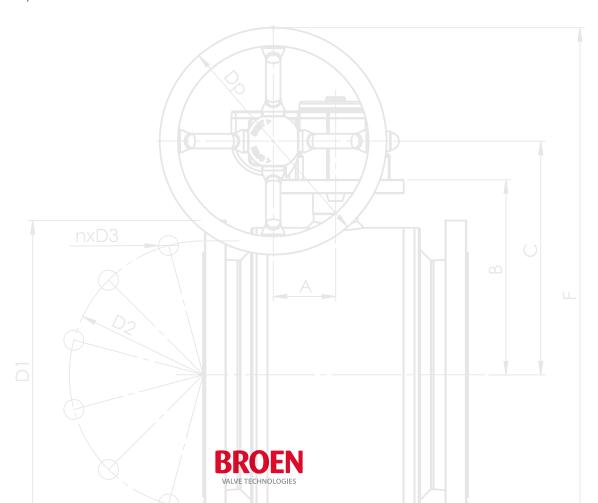

BROEN Ballomax® – our response Monoblock and short valves

BROEN Ballomax® monoblock and short valves offers a safe and modern construction for district heating networks, air conditioning and industrial installations with water, air, steam, gas and oil.

The monoblock and short valves are suitable for tight spaces fitting narrow build-in requirements when re-configuring or renovating pipelines.

The valve is tested and subjected to a 100% quality control before leaving the factory and it therefore requires minimal service for the rest of its life.




- All CE-marked valves are approved according to PED 2014/68/EU module H
- Highest Class A tightness EN 12266
- Double sealing : O-ring (EPDM), VITON,
- Temperature compensation (linear)
- Double bearing spindle system, diameter ≥ DN 65
- Operating temperature from -20°C to +200°C





DN15 - DN200 PN16 - PN25 - PN40


Heating - Cooling - Steam - Oil



BROEN Ballomax® monoblock ball valves with handle and ISO-flange acc. to EN ISO 5211.

Connection flange according to EN 10025-2.

DN15-32 | PN40

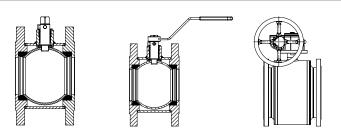

BROEN Ballomax® short ball valves without handle, with handles and with ISO-flange acc. to EN ISO 5211.

Connection flange according to EN 10025-2.

DN40-80 | PN16


Together with our comprehensive range of BROEN valves, actuators, gears, extensions and hot tapping tools, BROEN offers complete solutions for district energy.



BROEN Ballomax® block and short ball valves with gear.

Connection flange according to EN 10025-2.


DN100-200 | PN16

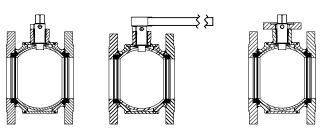

BROEN Ballomax® short ball valves without handles, with handles and with ISO-flange acc. to EN ISO 5211.

Connection flange according to EN 10025-2.

DN100-200 | PN16



Gear for BROEN Ballomax® monoblock and short ball valves.





Tmax: -20°C to +200°C

valve DN15-32

1. Ball material

SA351Gr CF8 acc. to ASME

2. Valve body

S355J2C Steel acc. to EN 100025-2

Monoblock ball Short ball valve DN40-80

1. Ball material

1.4306 (AISI 304) acc. to EN 10217-7

2. Valve body

P235GH acc. to EN 10217-2 / EN 10216-2


Short ball valve DN100-200

1. Ball material

1.4306 (AISI 304) acc. to EN 10217-7

2. Valve body

Steel P235GH acc. to EN 102017-2 / EN 10216-2

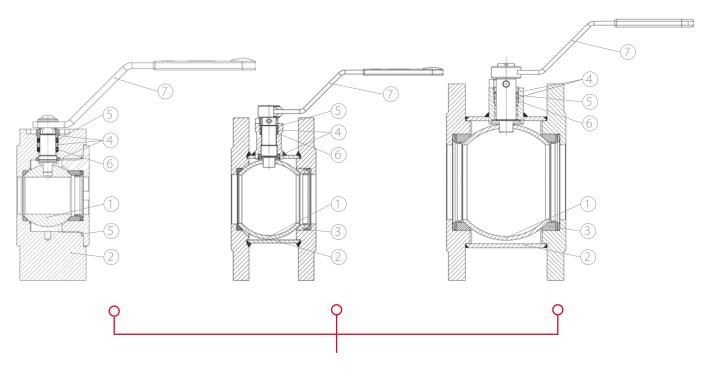

3. Ball sealing

PTFE + Carbon

4. O-ring - PTFE+C

5. O-ring - EPDM

6. O-ring - FKM (Viton)

7. Operation

Handle, no handle, ISO-flange acc. to ISO 5211










BROEN Ballomax® – block and short valves

Kv values and Build-in length dimension

| DN [mm] | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | 200 |
|---------------------------------|----|----|----|-----|-----|-----|-----|-----|-------|-------|-------|-------|
| Kvs [m3/h] | 32 | 57 | 81 | 133 | 229 | 295 | 498 | 754 | 1.159 | 1.841 | 2.652 | 5.720 |
| Build-in length dimension mm | 40 | 46 | 49 | 67 | 77 | 86 | 106 | 121 | 160 | 186 | 236 | 292 |

$\Delta P\text{-V}$ GRAPH Pressure losses on valve, depending on medium flow speed and valve diameter

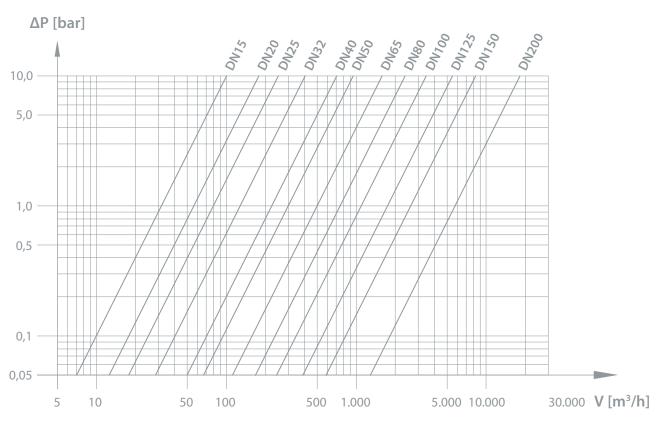



Ever since BROEN was established our passion for valve technology has been a major part of our core competences.

Our brand is our promise.



Our braud is our promise



BROEN Valve Technologies

BROEN is a leading international manufacturer of valve technology and we operate on three continents across the world with key markets in Europe, China and USA.

For more than 75 years BROEN has been the global leader in the development and production of valve technology for the control of water, air and gas. BROEN delivers complete solutions for HVAC building installations and is a leading supplier of district energy valves and valve technology for natural gas.

We know application and valve technology in depth and in close dialogue with our customers and partners all over the world we create value and reliability with proven valves offering full quality assurance.

BROEN is headquartered in Assens, Denmark and is part of Aalberts N.V. listed on the EuroNext Stock Exchange (NL).

Read more at: www.broen.com

Sales- and productions sites •

BROEN ApS, Assens (DK)
BROEN POLAND, Dzierżoniów (PL)
BROEN POLAND, Rogoźno (PL)
BROEN INC., Houston (US)
BROEN Clorius, Dzierżoniów (PL)

Sales companies and offices O

BROEN Assens (DK)
BROEN Helsinki (FI)
BROEN SEI, Bucharest (RO)
BROEN Beijing (CN)
BROEN Clorius, Shanghai (CN)



